

Drawing & Specification


3 Oct 2025 Version : V1

1-Phase Basic PDU

230V 16A : Slide-lock C13 x 18 + Combo C13/C19 x 6



unit : mm

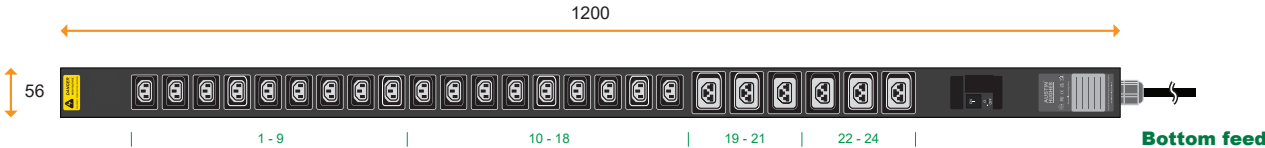

16A model 3.7 kVA	V18L13/6X19-16A/CR_EN/3B-1	16A MCB x 1	3M Cordset 3W 1.5mm sq. H05V V-F		IEC 60309 Inlet 2P+E 16A
--	----------------------------	-------------	--	--	--------------------------------

Circuit : 16A max., C13 # 1 - 18 + C13/C19 # 19 - 24

Slide Lock Outlet
Worldwide Patented

C13

C13/C19

Black



Specification

Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black
Product Dimension	: 56W x 55D x 1200H (mm)
Packing Dimension (2-in-1)	: 110W x 268D x 1793H (mm)
Net / Gross Weight	: 4.6 kg / 5.9 kg

Safety Certificates

CB	: IEC 62368-1:2018
CE/ LVD	: EN IEC 62368-1:2020
	EN IEC 62368-1:2020/A11:2020
UKCA	: BS EN IEC 62368-1:2020,
	BS EN IEC 62368-1:2020+A11:2020

EMC Certificates

CE / EMC	: EN 55032:2015+A1:2020
	EN 55035:2017+A11:2020
	EN IEC 61000-3-2:2019+A1:2021+A2:2024
	EN61000-3-3:2013+A1:2019+A2:2021

Environment : RoHS, Reach & WEEE



Design. Manufacturing. Global Services.

Copyright 2025 Austin Hughes Electronics Ltd. All rights reserved.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Mounting kit & Diagram

VMS Mounting Button



x 2

+




x 2



M4 Screw

- Flat head
- M4x8mm

PEG



Section A-A

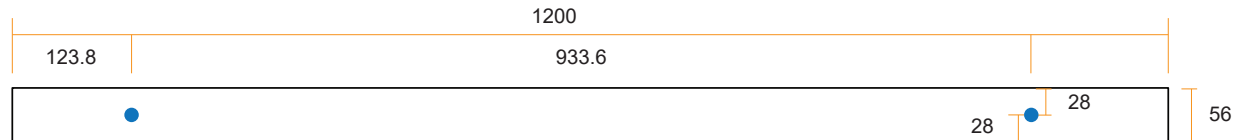

Top

Bottom

Unit : mm
1 inch = 25.4 mm

VMB Mounting Bracket



x 4

+





x 2

M3.2 Screw

- Flat head
- M3.2x6mm

Bracket

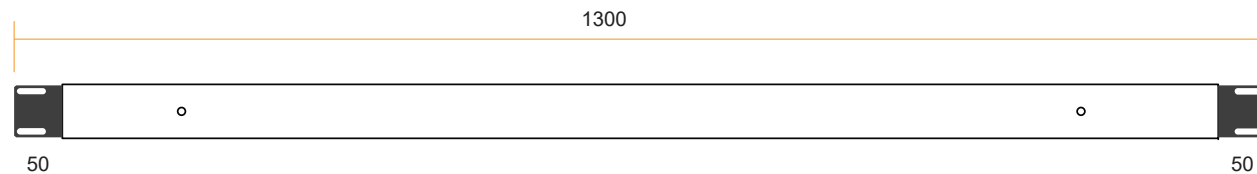

Top

Bottom