

Drawing & Specification


3 Oct 2025 Version : V1

1-Phase Basic PDU

230V 32A : Slide-lock C13 x 18 + Combo C13/C19 x 6



unit : mm

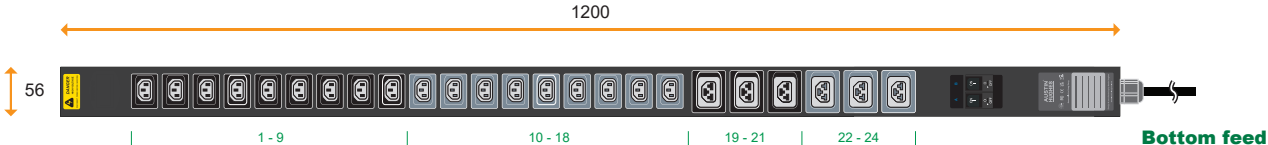

32A model	V18L13/6X19-32A/ CR _EN/3 B -1	16A MCB x 2	3M Cordset 3W 4.0mm sq. H05V V-F	IEC 60309 Inlet 2P+E 32A
7.4 kVA				

Circuit A : C13 # 1 - 9 + C13/C19 # 19 - 21
Circuit B : C13 # 10 - 18 + C13/C19 # 22 - 24

Circuit max. Amp. : 16A

Slide Lock Outlet
Worldwide Patented

C13		
C13/C19		
	Black	Grey





Specification		
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity (non-condensing)	:	8 to 95% RH
Chassis Material / Color	:	Steel / Black
Product Dimension	:	56W x 55D x 1200H (mm)
Packing Dimension (2-in-1)	:	110W x 268D x 1793H (mm)
Net / Gross Weight	:	5.4 kg / 6.7 kg


Safety Certificates	
CB	: IEC 62368-1:2018
CE / LVD	: EN IEC 62368-1:2020
	EN IEC 62368-1:2020/A11:2020
UKCA	: BS EN IEC 62368-1:2020,
	BS EN IEC 62368-1:2020+A11:2020
EMC Certificates	
CE / EMC	: EN 55032:2015+A1:2020
	EN 55035:2017+A11:2020
	EN IEC 61000-3-2:2019+A1:2021+A2:2024
	EN61000-3-3:2013+A1:2019+A2:2021
Environment : RoHS, Reach & WEEE	

Mounting kit & Diagram

VMS Mounting Button

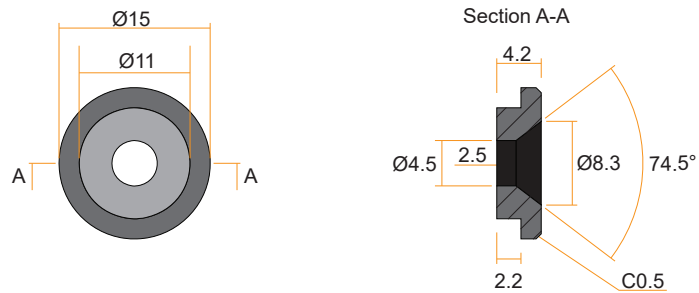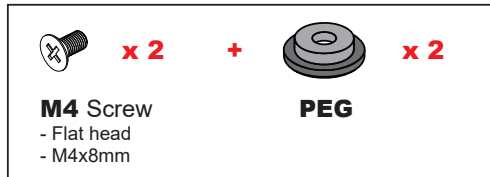



Top

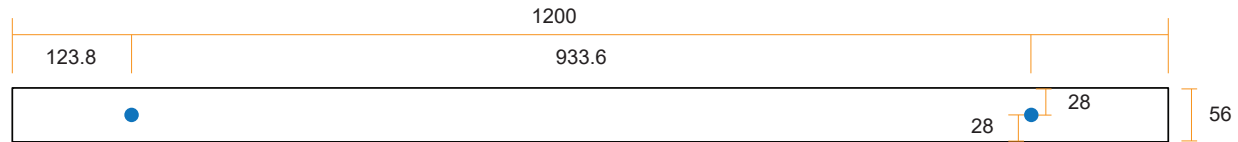


Bottom

Unit : mm
1 inch = 25.4 mm

VMB Mounting Bracket

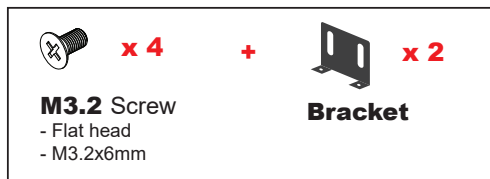

Top

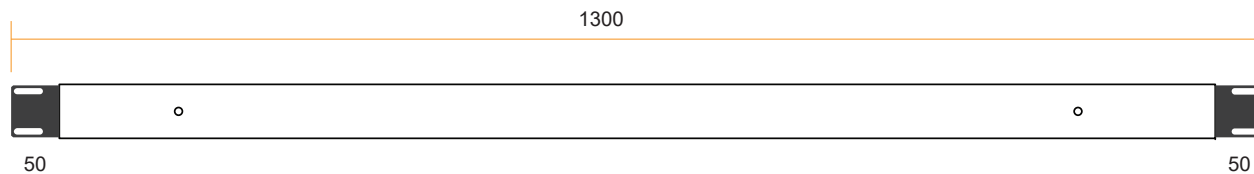

Bottom