

Drawing & Specification


3 Oct 2025 Version : V2

1-Phase IP PDU - Circuit monitoring

230V 32A : Slide-lock C13 x 18 + Combo C13/C19 x 6



unit : mm

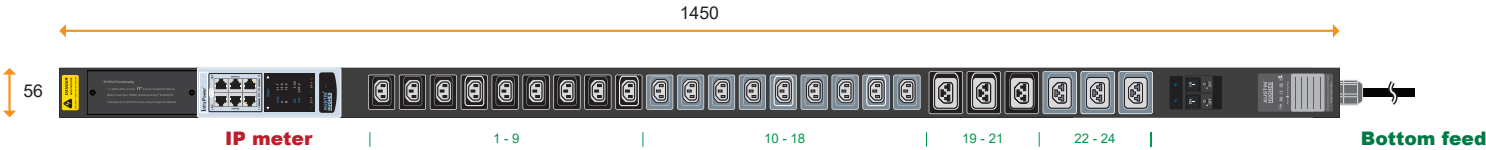

32A model	V18L13/6X19-32A-Z/ CR _EN/ 3B -1	16A MCB x 2	3M Cordset 3W 4.0mm sq. H05V V-F	IEC 60309 Inlet 2P+E 32A
7.4 kVA				

Circuit A : C13 # 1 - 9 + C13/C19 # 19 - 21
Circuit B : C13 # 10 - 18 + C13/C19 # 22 - 24

Circuit max. Amp. : 16A

Slide Lock Outlet
Worldwide Patented

C13


C13/C19

Black

Grey



Specification		
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity (non-condensing)	:	8 to 95% RH
Chassis Material / Color	:	Steel / Black
Product Dimension	:	56W x 55D x 1450H (mm)
Packing Dimension (2-in-1)	:	110W x 268D x 1793H (mm)
Net / Gross Weight	:	6.2 kg / 7.5 kg



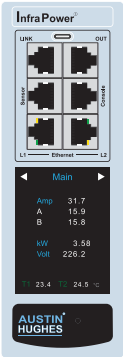


Meter Features	
Local Display	: Field replaceable 2.8" color LCD with touchscreen
Bank Measurement	: Current (A), Energy (kWh), Voltage (V) & Power factor
Accuracy	: ±0.5% Billing-grade
IP Access	: Embedded Dual Gigabit LAN IP Dual LAN Network Failover Enterprise IP Authentication, LDAPv3 / LDAPS Active Directory®, RADIUS, 802.1x SNMP V2 V3, Web GUI, Modbus/TCP, RestAPI, LUA
Protocol	: Up to 32 PDU under single IP address
Cascade	: PDU configuration
Console port x 1	: Wi-Fi connection, firmware update, backup power for meter
USB-C port x 1	: Temp. Sensor / Temp. + Humid. Sensor / Door Sensor (support daisy chain sensors up to 4)
Sensor Port x 1	

Safety Certificates	
CB	: IEC 62368-1:2018
CE/ LVD	: EN IEC 62368-1:2020 EN IEC 62368-1:2020/A11:2020
UKCA	: BS EN IEC 62368-1:2020, BS EN IEC 62368-1:2020+A11:2020
EMC Certificates	
CE / EMC	: EN 55032:2015+A1:2020 EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019+A1:2021+A2:2024 EN61000-3-3:2013+A1:2019+A2:2021
Environment : RoHS, Reach & WEEE	

Mounting kit & Diagram

VMS Mounting Button

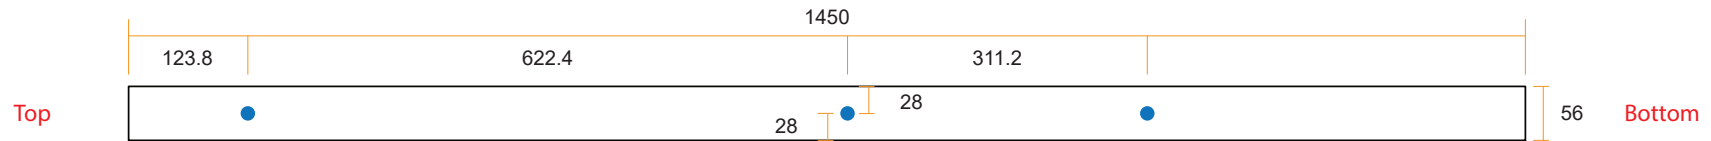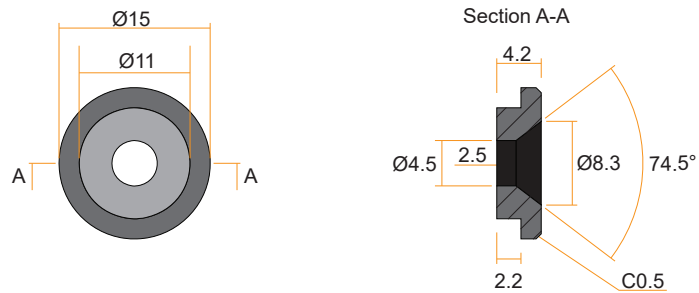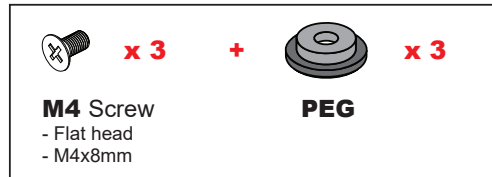

Unit : mm
1 inch = 25.4 mm

VMB Mounting Bracket

