



1-Phase metered PDU specification drawing

230V 16A / 20A / 32A PDU : C13 x 20 + C19 x 4


unit : mm

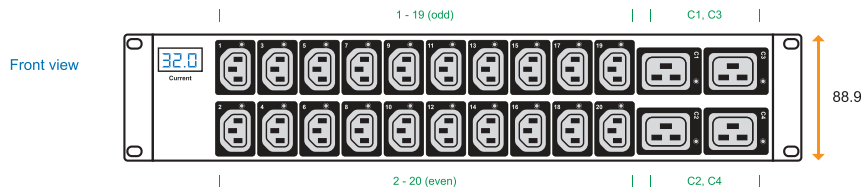

Rear view

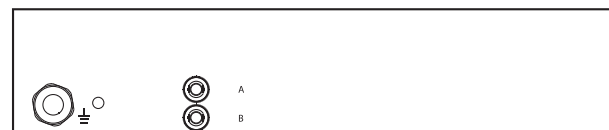

Resettable fuse

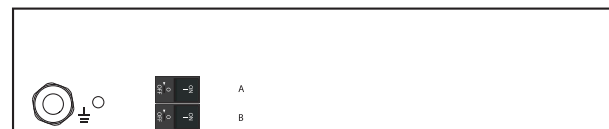

MCB



IEC 60309 Inlet

32A model :	Circuit Protection
H20C13/4C19-32A-MD/F_EN/3B-1	Resettable Fuse x 2
H20C13/4C19-32A-MD/CR_EN/3B-1	1-pole MCB x 2

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 16A max., C13 #1-19 (odd) + C19 #C1,C3
Circuit B : Output 16A max., C13 #2-20 (even) + C19 #C2,C4
Weight : Net 2.69 Kg / Gross 3.02 Kg

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color: Black



Open end

20A model :	Circuit Protection
H20C13/4C19-20A-MD/F_OE/3B-1	Resettable Fuse x 1
H20C13/4C19-20A-MD/CR_OE/3B-1	1-pole MCB x 1

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 20A max., C13 #1-20 + C19 #C1-C4
Weight : Net 3.58 Kg / Gross 3.92 Kg



IEC 60309 Inlet

16A model :	Circuit Protection
H20C13/4C19-16A-MD/F_EN/3B-1	Resettable Fuse x 1
H20C13/4C19-16A-MD/CR_EN/3B-1	1-pole MCB x 1

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-20 + C19 #C1-C4
Weight : Net 3.03 Kg / Gross 3.36 Kg



IEC320 C20

16A model :	Circuit Protection
H20C13/4C19-16A-MD/F_C20/3B-1	Resettable Fuse x 1
H20C13/4C19-16A-MD/CR_C20/3B-1	1-pole MCB x 1

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-20 + C19 #C1-C4
Weight : Net 3.10 Kg / Gross 3.43 Kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)

Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current (A)
Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH